

PCTWORLD INTELLECTUAL PROPERTY
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER TI

WO 9608671A1

(51) International Patent Classification ⁶:F16S 3/02, F04H 12/00, 12/08, 12/34,
15/16, F16M 13/08, E04C 3/30

A1

(11) International Publication Number:

WO 96/08671

(43) International Publication Date:

21 March 1996 (21.03.96)

(21) International Application Number: PCT/AU95/00596

(22) International Filing Date: 11 September 1995 (11.09.95)

(30) Priority Data:

PM 8105


13 September 1994 (13.09.94) AU

(71)(72) Applicant and Inventor: MITCHELL, John, Albert
[GB/AU]; 12 Moore Street, Ferntree Gully, VIC 3156
(AU).(74) Agent: CARTER SMITH & BEADLE; Qantas House, 2
Railway Parade, Camberwell, VIC 3124 (AU).(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH,
CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE,
KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK,
MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI,
SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent
(AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW,
SD, SZ, UG).

Published

With international search report.

(54) Title: COLLAPSIBLE STRUCTURAL MEMBER

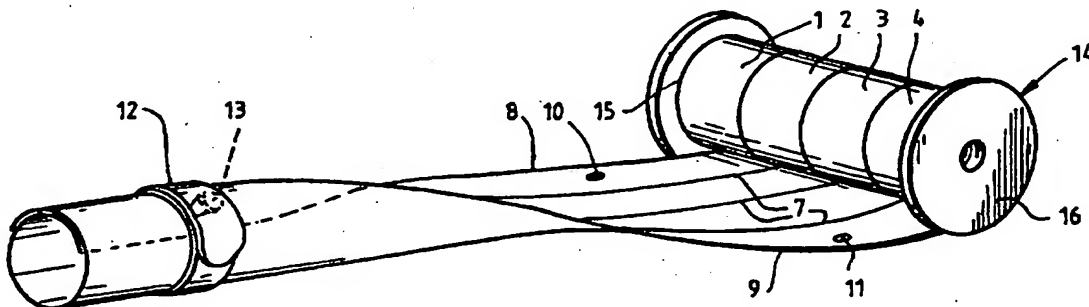

(57) Abstract

A generally cylindrical structural member comprising four thin high-tensile heat-treated stainless steel spring strips (1-4) of the type used in the manufacture of flexible measuring tapes, flexibly joined at their adjacent edges by vinyl adhesive tape (5 and 6) to create a hinge (7) between the adjacent edges of the strips (1-4), each strip (1-4) having a curved cross section so that the connected strips form a cylindrical structural member when the free edges (8 and 9) of the outermost strips (1 and 4) are overlapped and connected by a binding strip (12) carrying a locking pin (13) which engages holes (10 and 11) formed in the overlapped edges to hold the overlapped edges in the assembled condition to form a rigid structural member, such as a tent pole.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

COLLAPSIBLE STRUCTURAL MEMBER**Field of the Invention**

This invention relates to improvements in structural members such as poles, columns, beams, struts and the like.

5 Background of the Invention

The need for a readily collapsible structural member, such as a pole, is self-evident to any person frustrated by the need to store and carry tent poles. While tent poles formed from interfitting pole elements reduce the storage problem slightly, the elements can become misplaced thereby rendering the remaining
10 elements useless. Other devices having structural members having longitudinal rigidity, such as aerial/lighting masts, are also able to benefit by being collapsible or coilable.

Numerous proposals for collapsible or coilable structural members are to be found in the patent literature, but none of these proposals has thus far found
15 commercial success. For example, International Publication WO87/05067 describes a coilable structural member comprising a series of block members hinged together so as to be coilable but being rigid when uncoiled. A similar arrangement is disclosed in U.S. Patent No 3925943, Petri, in which the block members are formed from a length of flexible material. Each of the above proposals has the
20 disadvantage of being relatively expensive to manufacture and comparatively bulky when in its coiled form.

Summary of the Invention and Object

It is an object of the present invention to provide an improved structural member having a less bulky construction than the proposals outlined above and
25 which nevertheless provides a functional structural member which can be coiled into a compact form for storage.

The invention provides a structural member comprising a multiplicity of elongate thin flexible elements flexibly joined to each other in the longitudinal direction to form an open sided assembly of elements having free edges, means for
30 connecting the free edges of the elements to define a closed structural member having compressive strength but being coilable when said edges are disconnected.

By using flexibly connected thin flexible elements to define the structural member, the structural member has a high strength to weight ratio, a large size to stored volume ratio and is easily manually assembled without welding. The structural member is suitable for use in any situation that requires a lightweight compression member, for example, camping equipment tent poles, walking sticks, chair legs, storage stands, roll-up signs with integrated supports, tools requiring extendible handles, surveying and photographic equipment requiring tripods, survey poles, temporary barricades and aerial or lighting masts. The structural members can also be used in the construction of small bridges in remote areas where vehicle access is difficult.

In one form of the invention, at least three elements are used, each element comprising a thin high tensile steel strip of the type used in the manufacture of flexible measuring tapes. Each strip is preferably cold rolled to create a curved cross section having the required dimensions. The elements are joined at their adjacent edges by a flexible connection which allows the elements to be formed into a generally cylindrical structure with its free edges connected together.

The flexible connection can take any convenient form. For example, adhesive tape applied to the opposite faces of adjacent edges of the elements forms a satisfactory flexible connection enabling the formation of a rigid structure which is coilable for storage. Preferably, the tape covers the opposite faces of the steel strips to provide protection against corrosion and mechanical damage.

Where only three elements are used, the free edges are partially overlapped or butted together and are suitably connected to prevent the structural member opening. Where four elements are used, the free edges are preferably fully overlapped and are pinned together to increase the structural integrity of the structural member.

The means for connecting the free edges may comprise a series of spaced binding strips, preferably having a locking pin which engages aligned holes in the overlapping free edges of the elements to positively locate the free edges with respect to each other. Although it is desirable to positively locate the free edges by means of pins or the like, an acceptable structural member can be formed for

some uses by simply binding the butted or overlapped edges together, say by means of adhesive tape applied around the structural member at spaced intervals applied longitudinally over the butted or overlapped edges.

5 A stronger structural member can be created by forming the butted or partially overlapped adjacent edges of the elements with an array of alignable perforations adapted to receive a corresponding array of pins or hooks, preferably carried by a flexible backing strip, and capable of insertion into the holes by means of a mechanical slider engaging the edges of the flexible strips. Other more complex arrangements are described in greater detail below.

10 The flexible elements are preferably coilable onto one or more formers and the formers can also perform the function of containing the ends of the structural member in the assembled condition.

Brief Description of the Drawings

15 In order that the invention may be more readily understood several embodiments of the invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a fragmentary perspective view of a structural member in the partly assembled and coilable condition according to a first embodiment;

Figure 2 is a similar perspective view of a second embodiment;

20 Figure 3 is a schematic perspective view of a third embodiment;

Figure 4 is a fragmentary schematic perspective view of the structural member before assembly with an enlarged fragmentary sectional elevation of the flexible hinge connection;

25 Figure 5 is an elevation of an assembled tent pole according to the embodiment of Figure 1;

Figure 6 is a sectional elevation of the tent pole detailing the end fittings; and

Figures 7 and 8 are sectional elevations of two further assembled structural members.

30 Description of Preferred Embodiments

Referring firstly to Figures 1 and 4, the first embodiment of the invention

comprises four thin high-tensile heat-treated spring stainless steel strips 1 to 4 of the type which are used in the manufacture of flexible measuring tapes, flexibly connected at their adjacent edges by vinyl adhesive tape 5 and 6 to create a flexible joint or hinge 7 between the adjacent edges of the strips 1 to 4. In the present embodiment, the vinyl tape covers each strip 1 to 4 to provide protection against corrosion and mechanical damage.

Each strip 1 to 4 has been cold rolled to create a curved cross-section so that the connected strips form a cylindrical structural member when the free edges 8 and 9 of the outermost strips 1 and 4 are overlapped and connected in a suitable manner. In the embodiment shown in Figure 1, the strips 1 and 4 are formed with a series of spaced holes 10 and 11 which are aligned when the edges 8 and 9 are overlapped in the manner shown in Figure 1 and a binding strip 12 carrying a locking pin 13 which engages the holes 10 and 11 to hold the overlapped edges 8 and 9 in the assembled condition to form a rigid structural member, such as a tent pole (Figure 5). The binding strip 12 has velcro elements on its overlapped portions to hold the binding strip in the assembled position.

As shown in Figure 1, the coiled strips 1 to 4 are carried by a storage drum 14 comprising a pair of elements 15 and 16 which are fitted to the ends of the structural member as shown in Figure 6 of the drawings to complete the ends of the tent pole. When the strips are coiled, as shown in Figure 1, the binding strips 12 can be used to keep the strips in their coiled condition, as shown schematically in Figure 5 of the drawings.

It will be appreciated from the above that the structural member shown in Figure 1 of the drawings has extremely high strength and large size for its weight and can be coiled so as to be stored within a volume which is very small compared to the size of the assembled structural member.

In the embodiment shown in Figure 2 of the drawings, a three strip structure is shown in which the free edges are perforated at 20 to receive correspondingly spaced hooks 21 supported by a flexible backing 22 and applied to the butted or partially overlapped free edges of the strips by a mechanical slider 23 which engages the free edges and pushes the hooks through the aligned holes 20 as the

slider is moved along the length of the strips. This arrangement enables the structural member to be rapidly assembled and forms a somewhat stronger structural member compared with the embodiment of Figure 1. Otherwise, the structural member is the same in principle to the structural member shown in Figure

5 1.

In the embodiment of Figure 3, three overlapped strips 30, 31 and 32 having perforated overlapped edges 33 are joined by high strength joining ribbons 34 which are forced through the perforated edges by a hand or power operated mechanical feed device 35 with tapered locking pins engaging loops 36 in the ribbon 34 to hold the assembly together.

Figures 7 and 8 of the drawings show further examples of storage drum end-connector configurations, the construction of each of which will be self-evident from the drawings, and which includes a cylindrical groove in each end-connector dimensioned to receive the ends of an assembled structural member to contain the ends and to provide functional fittings for the ends. For example in Figure 6 the end element 15 provides a tent pole supporting base while the element 16 provides a top end fitting with a locating pin which also functions as a threaded connecting bolt for forming the storage drum 14. Other threaded connectors are shown in Figures 7 and 8.

In the case of Figure 8, an internal spring S provides additional rigidity against bending or buckling of the structural member, which is otherwise formed as previously described.

It will be appreciated that other embodiments employing the principle of the invention described above will be readily apparent to persons skilled in the art. The possible uses of structural members embodying the invention detailed above constitute only a small number of the possible uses to which the structural member embodying the invention may be put. The structural member offers significant advantages over the prior art structural members referred to above, particularly in relation to the large size to stored volume ratio and the high strength to weight ratio.

CLAIMS:

1. A structural member comprising a multiplicity of elongate thin flexible elements flexibly joined to each other in the longitudinal direction to form an open sided assembly of elements having free edges, means for connecting the free edges
5 of the elements to define a closed structural member having compressive strength but being coilable when said edges are disconnected.
2. The structural member of claim 1, wherein there are three elements flexibly joined at their adjacent edges.
3. The structural member of claim 1 or 2, wherein each element comprises a
10 thin high-tensile stainless steel strip having a curved cross-section, of the type used in tape measures, said elements being joined at their adjacent edges by a flexible connection which enables the elements to form a generally cylindrical structure when the free edges of the member are connected together.
4. The structural member of claim 2 or 3, wherein said adjacent edges are
15 butted together or overlapped and are connected to prevent the structural member opening.
5. The structural member of claim 2, 3 or 4, wherein said free edges are butted together or overlapped and are secured to each other to prevent the structural member opening and to increase the structural integrity of the structural member.
- 20 6. The structural member of claim 4 or 5, wherein said adjacent edges and/or said free edges are connected by a binding strip.
7. The structural member of claim 6, wherein said binding strip comprises adhesive tape adhesively secured to said elements longitudinally over the butted or overlapped edges.
- 25 8. The structural member of claim 6, wherein said binding strip carries one or more locking pins or hooks engaging aligned holes in the overlapping free edges of said elements to positively locate the free edges with respect to each other.
9. The structural member of claim 8, further comprising a mechanical slider which engages said free edges and pushes said pins or hooks through said aligned
30 holes as the slider is moved along the length of the strips.

10. The structural member of claim 6, wherein said binding strip is located internally of said structural member, with looped portions of said binding strip projecting through aligned holes in overlapping free edges of said strips, said looped portions being engaged by locking pins.
- 5 11. The structural member of claim 8, comprising a plurality of said binding strips extending circumferentially of said structural member, each binding strip carrying a pin which engages aligned holes in the overlapping free edges of said elements.
- 10 12. The structural member of any preceding claim, further comprising end connectors enclosing the ends of the structural member.
13. The structural member of claim 12, wherein said end connectors include means for connecting the end connectors together to form a storage drum for the structural member when in its coiled condition.

1/3

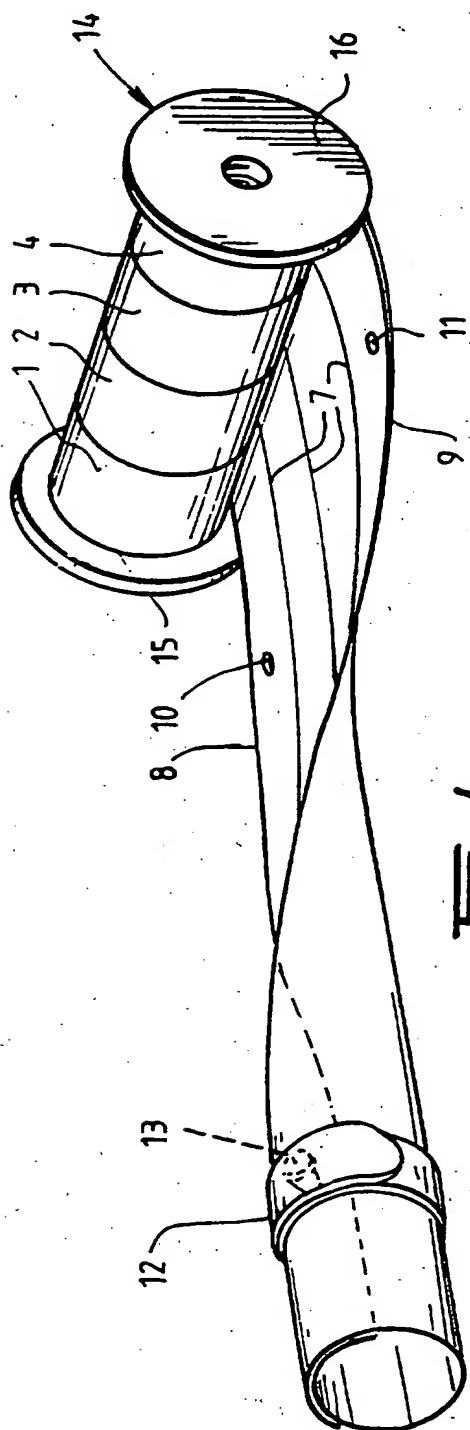


Fig. 1.




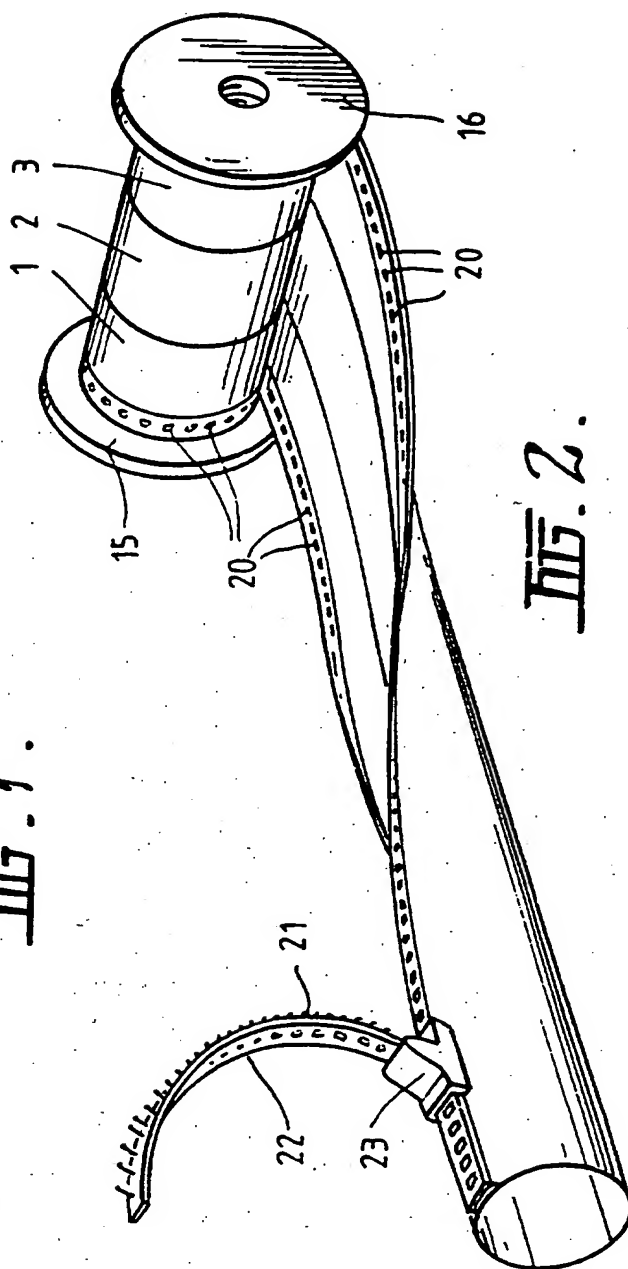


Fig. 2.

2/3

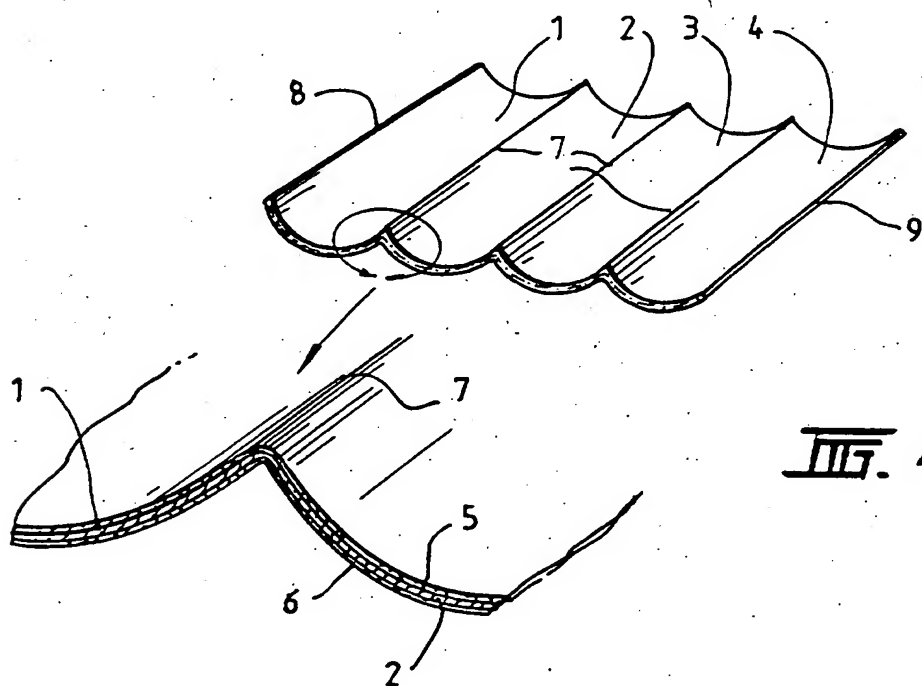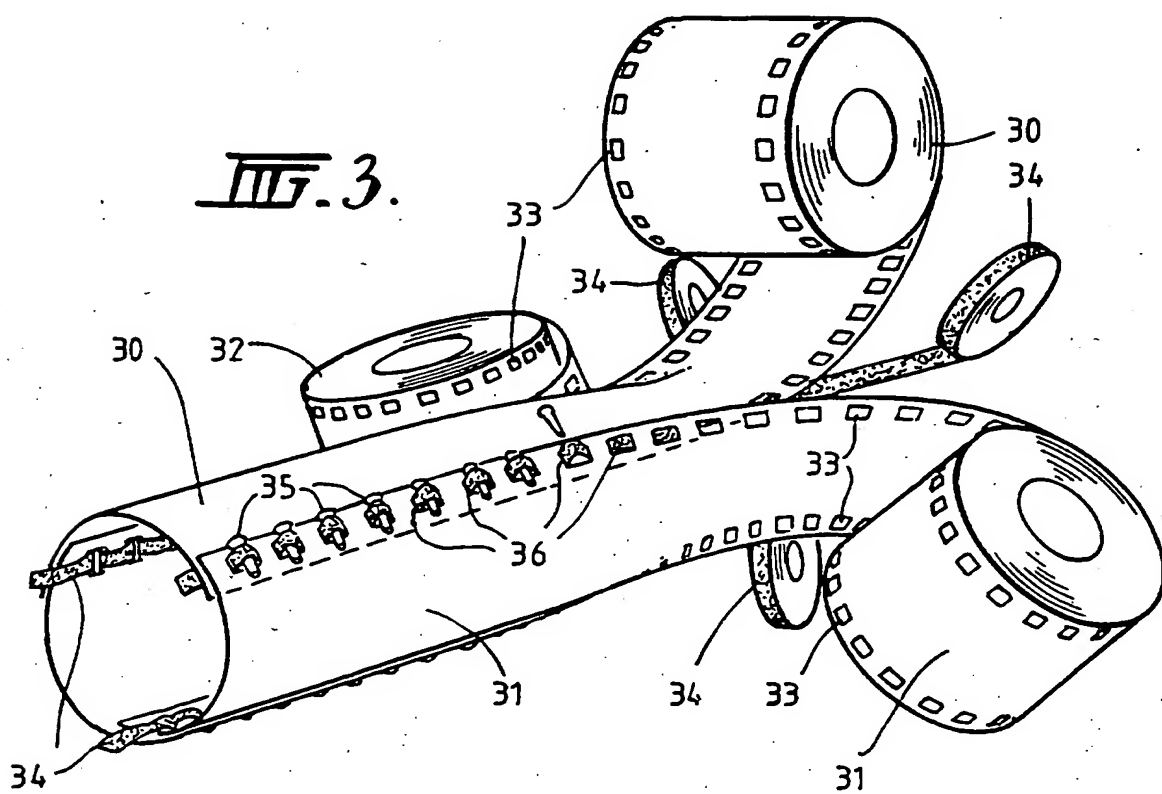

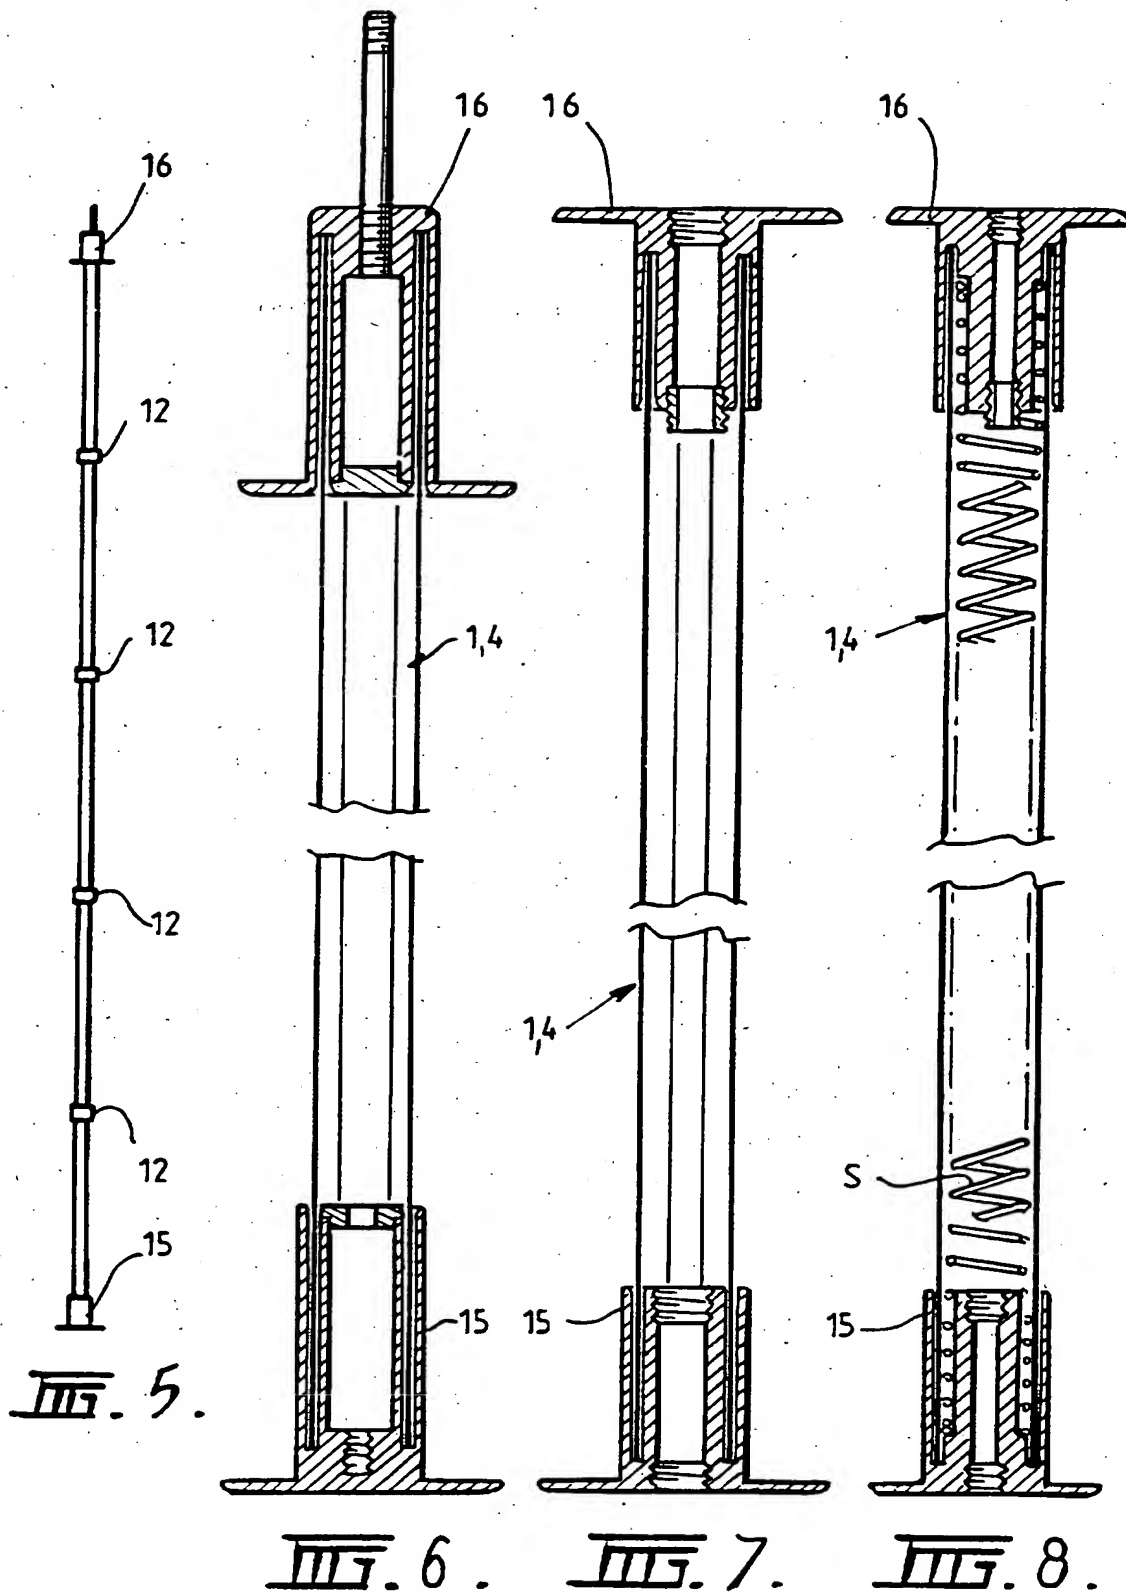

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/AU 95/00596

A. CLASSIFICATION OF SUBJECT MATTER

Int Cl⁶: F16S 3/02; F04H 12/00, 12/08, 12/34, 15/16; F16M 13/08; E04C 3/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC : F16S 3/02; E04H 12/00, 12/08, 12/34, 15/16; F16M 13/08; E04C 3/30

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

AU : IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DERWENT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CH 670692 A (KANZIG) 30 June 1989 See figure 1	1
X	US 3503164 A (BERRY et al) 31 March 1970 See figures 1 and 2	1-6
X	US 4850161 A (McGLINNIS) 25 July 1989 See figure 4	1-6

☒ Further documents are listed in the continuation of Box C

☒ See patent family annex

<p>* Special categories of cited documents:</p>	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
13 December 1995

Date of mailing of the international search report
28 December 1995

Name and mailing address of the ISA/AU
AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION
PO BOX 200
WODEN ACT 2606
AUSTRALIA Facsimile No.: (06) 285 3929

Authorized officer

D.R. LUM

Telephone No.: (06) 283 2544

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/AU 95/00596

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4651480 A (KRAMER) 24 March 1987 See figures 1 and 2	1, 2, 4, 5
X	US 4625475 A (McGLINNIS) 2 December 1986 See Column 1 lines 35-60	1-6
X	US 4386485 A (KRAMER) 7 June 1983 See Figure 1	1, 4, 5
X	AU 32533/89 B (605971) (RAPID DEPLOYMENT TOWERS INC) 12 October 1989 See Figures 3-5	1-6
X	AU 5826/66 B (293241) (SANDERS ASSOCIATES, INC) 23 November 1967 See Figure 1	1-6
X	SE 459267 A (SÖKANDE) 19 June 1989 See Figures 1-6	1-6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.
PCT/AU 95/00596

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
US	4386485	BE	901071
US	4651480	GB	2184466

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ BLACK BORDERS

☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**